

# vCam-6 HD INSPECTION SYSTEM

Increase productivity and profitability with the feature-rich vCam-6 inspection camera system. Built tough and reliable for everyday use, the versatile vCam-6 is a good fit for plumbers, contractors, home inspectors, building maintenance supervisors, or anyone looking to inspect the interior of a pipe or duct. Create crisp, detailed HD video inspections with audio comments, text descriptions, footage, date, and timestamps to submit to your customers without worry. Putting in a full days' work is easy with the four-hour battery life and charging on-the-go with the provided AC and DC charging leads.

- 1080p HD camera heads
- 1 Terabyte hard drive
- 4-Hour battery life
- Wi-fi with smartphone/tablet app
- HDMI video/audio port
- One-touch recording and image capture
- One-year warranty
- Camera exchange program
- Backward compatible<sup>(1)</sup>

WIFI - Powerful 150' / 45m Range

Daylight viewable LCD

USB Mini data port for LACP software interface

Record to 1 TB hard drive or USB

Internal microphone and on-screen distance counter

AC/DC operation with Li-ion rechargeable batteries

Camera test port

Stainless-steel construction reels and camera heads

Full QWERTY keyboard

512Hz/640Hz/33kHz sonde and traceable pushrod

Field serviceable spring, coiled cable and lanyards

Self-leveling 34mm HD Camera

Self-leveling 46mm HD Camera



Backed by Vivax-Metrotech's superior dealer network, customer service and service centers.

## Camera Heads

	D34-HD	D46-HD
<b>Dimensions:</b>	1.3" / 34mm x 2.9" / 73mm	1.8" / 46 mm x 2.7" / 68.8mm
<b>Lighting:</b>	12.87 Lumens	44.02 Lumens
<b>Resolution:</b>	1080p	1080p
<b>Construction:</b>	Stainless steel housing with Sapphire Lens	
<b>Environmental:</b>	11 Bar	11 Bar
<b>Field of view:</b>	96 degrees	96 degrees

## Type-CP Standard Reel

<b>Dimensions:</b>	28" (L) x 19.7" (W) x 35.8" (H) 710 mm (L) x 500 mm (W) x 910 mm (H)
<b>Construction:</b>	Stainless-steel tubular frame with stainless hardware
<b>Weight:</b>	200ft/30m = 57 lbs. (26kg) 300ft/90m = 68 lbs. (31kg) 400ft/120m = 79 lbs. (36kg)
<b>Environmental:</b>	Water resistant to IP54

## Control Module

<b>Dimensions:</b>	14.2" (L) x 5.91" (W) x 12.6" (H) 360 mm (L) x 150 mm (W) x 320 mm (H)
<b>Weight:</b>	12Lbs. / 5.49kg
<b>Screen:</b>	9.7" / 24cm Daylight viewable (1024 x 768)
<b>Battery Life:</b>	Four hour runtime (six hour with sonde off)
<b>Environmental:</b>	Water resistant to IP54 (IEC 60529-Light shower w/ lid closed) Shock resistant (IEC 600682-3-1) (lid closed)


(1) The vCam-6 control module is HD (high definition) when used with the new D34-HD and D46-HD camera heads. The vCam-6 control module is backward compatible with the legacy D18-MX, D26-MX, D34-C, D34-M, and D46-CP analog camera heads but will produce SD (standard definition) video and pictures when used with these cameras.

## Recommended Locators



VM-540 and vLoc3-Cam

## Popular Accessories

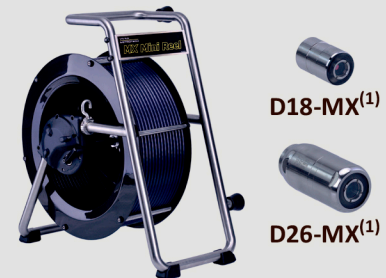

Mini-Reel and Cameras



Rotate and Tilt Mounting Table



Camera Guide Skirts



Type-B Adjustable Skid with Light